




PULLER ATTACHMENT


氣動式切帶系列產品 Pneumatic Tape Cutter Series

特殊規格接受訂貨生產
Special specification Available for custom-made


TCM-L25/F

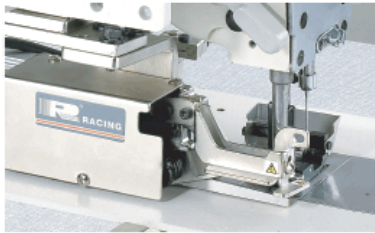

TCM-M45/C

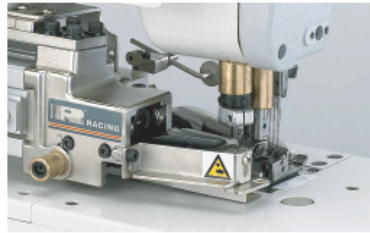

TCM-H50/C

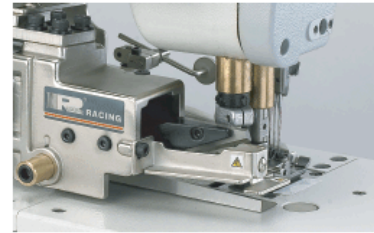

訂貨說明

Order Guide

TCM - L25 / F

1 2 3

注意：此切刀裝置安裝位置會與拉布機或其它裝置產生干涉，不能同時安裝

Note: The mounting position of the tape cutter interfere with puler or other attachments, so they can't be installed on sewing machine at the same time.

1 ● 切帶方式 ● Tape Cutting Way

- M: ● 觸動式切帶
● Manual Cutting Switch

E8: 膝蓋觸動(標準配備)
Knee switch (regular parts)



E11: 左手觸動(選擇配備)
Left manual switch (optional parts)



E12: 右手觸動(選擇配備)
Right manual switch (optional parts)



A:

- 光電感測式自動切帶：可自動前、後切帶。含膝蓋觸動式切帶(選擇配件：左、右手觸動式切帶)

- Auto Cutting by Photo-sensor:
Cut before and finish sewing material automatically.
Including Knee Cutting Switch
(Optional parts: Left or Right manual switch)



2 ● 切刀規格代號 ● Item No. of cutter


代號 Den No.	切帶寬度 Tape Width mm	切帶能力 Cutting Capability
L25 薄物用 Light	25 (刃長35) (blade 35)	1 層 Layers
M45 中物用 Medium	45 (刃長55) (blade 55)	4 層 Layers
H50 厚物用 Heavy	50 (刃長60) (blade 60)	10 層 Layers

* 切帶能力是以14盎司的布料(工作氣壓:5kg/cm²)為準，謹供參考，購買時要以實際布料狀況為準。


* Cutting Capability is based on 14oz of material for your reference only.(Operating pressure : 5kg/cm²) Please consider the exact material condition before ordering.

3 ● 安裝針車 ● Sewing Machine type

- F: ● 平床車用基座
● Bracket for Flatbed Machine

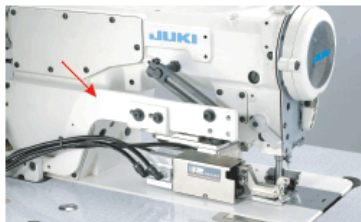

- C: ● 飾縫車用基座
● Bracket for Coverstitch Machine

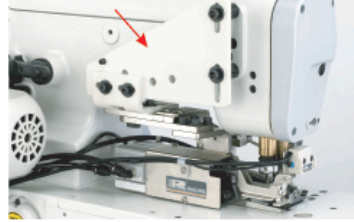

- 可活動基座 (標準配件)
● Moveable bracket (standard parts)

